



IVENDO Solar
ul. Wojska Polskiego 2D
14-200 Iława

Installation instructions for the system on a flat roof

KDP-M

This manual provides information on how to assemble the mounting structure for 4 horizontally arranged modules.

Materials:

- Stainless steel A2
- Aluminum 6060 T66



It is essential that you familiarize yourself thoroughly with the instructions and use them in accordance with the intended purpose.

Information about the security

Before starting the assembly work, you should familiarize yourself with the following safety instructions, which will reduce the risk of an accident.



Attention! The setup and connection should be performed by qualified personnel with the appropriate authorizations. The general safety rules must also be observed.



Attention! During the work, it is necessary to observe the applicable national and European standards, especially the electrical installations. It is also necessary to follow the instructions of the other components, e.g. the inverter.



Attention! Danger of falling from heights. The rules for working at heights and the necessary safety equipment such as harnesses and safety ropes must be observed.



Attention! Danger of falling objects. Special care must be taken. Before starting work, the assembly area must be appropriately secured to avoid hazards.



Attention! Warning of electric current. Be particularly careful when performing electrical work, especially when connecting modules and when setting up and connecting the inverter to the modules.








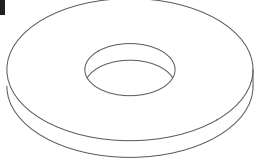


Attention! Warning about highly flammable materials. Photovoltaic modules, inverters and other electrical equipment should not be used near easily flammable materials.



Attention! The assembly work must not be carried out by persons under the influence of alcohol or other intoxicating substances.

Elements list

A 	Mounting plate <hr/> 16 pcs <i>Material: Magnelis</i>	B 	Mounting bar <hr/> 16 pcs <i>Material: Aluminum</i>
C 	Neck bolt <hr/> 32 pcs <i>Material: Stainless steel</i>	D 	Flange nut M10 <hr/> 32 pcs <i>Material: Stainless steel</i>
E 	End clamp <hr/> 16 pcs <i>Material: Aluminum</i>	F 	Allen screw M8 <hr/> 16 pcs <i>Material: Stainless steel</i>
G 	Elongated T-nut M8 <hr/> 16 pcs <i>Material: Stainless steel</i>	H 	Enlarged washer M10 <hr/> 32 pcs <i>Material: Stainless steel</i>

Assembly instruction



Necessary tools:

- Allen key (size 5)
- Combination wrenches (size 13, 15 and 17 mm)
- Variable speed screwdriver
- PZ cross screwdriver bits / bits



Tightening torques:

- Tighten the middle and end clamps with a force of 8.5 Nm
- Tighten M8 bolts and nuts with a force of 18 Nm
- Tighten M10 bolts and nuts with a force of 36 Nm



Staffing for assembly:

- At least 2 persons



Assembly time:

- About 2 hours

Control and maintenance

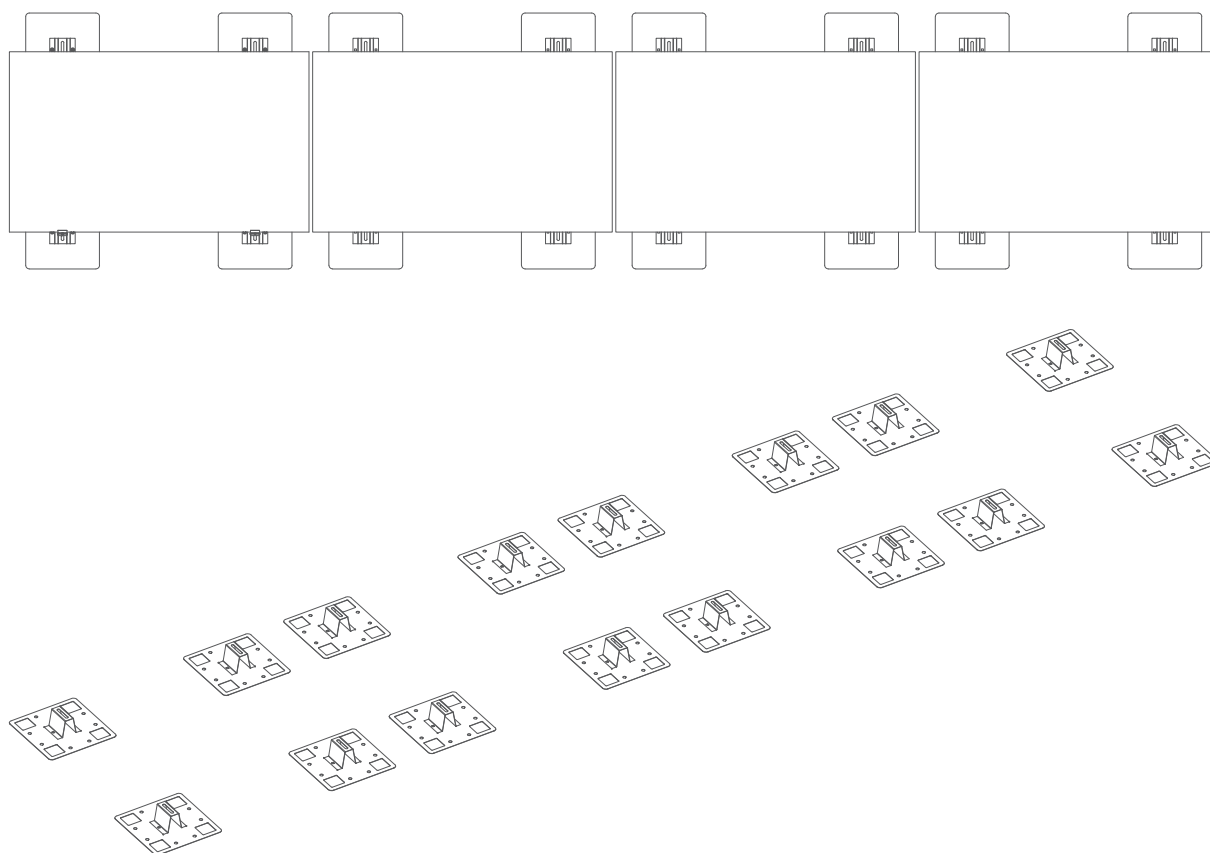
During the installation work, it must be ensured that the photovoltaic system is used is used according to its intended purpose. All changes in the use of construction elements, including connection with elements that do not come from IVENDO Solar, the modification of the construction by welding, shortening, lengthening, drilling, etc., and increasing the load on the systems will result in the loss of warranty claims and may have a direct impact on the life of the systems and their safe use.

The technical inspection and maintenance of the mounting system should be carried out at least once every six months, special attention should be paid to:


- Bolted connections,
- The condition and connections of the electrical cables are checked,
- the visual condition of the PV modules (contamination, mechanical damage) is checked.

Montaż zestawu


- 1 Before proceeding with the assembly, it is necessary to determine the layout of the modules (Fig. 1) and mounting plates. (Fig. 2) The method of attaching the mounting structure to the roof slope depends on its type and is selected individually.



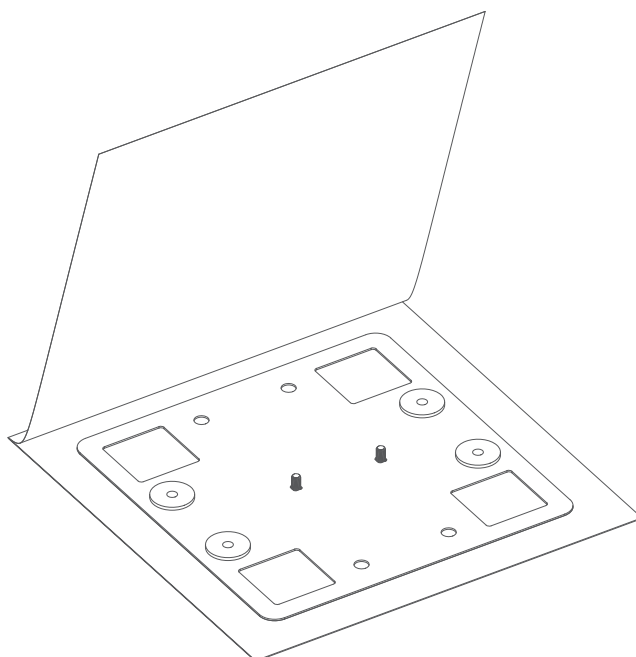
- 2 Cut the membrane/ roofing felt to size 510x510 mm. Make holes for the lock bolts. Weld the membrane/roofing felt at four fixing points and 50 mm around the fixing plate.




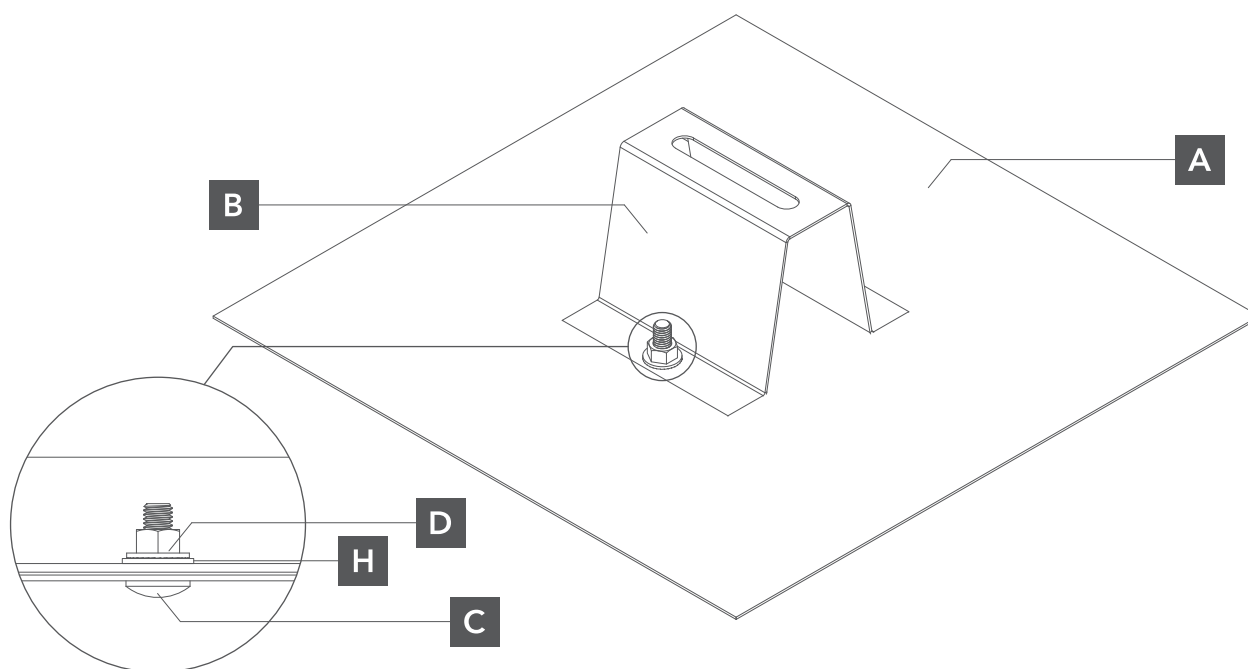- 3** Install the M10 bolts and washers in the plate, connect it to the bar and arrange it in the desired place on the roof. Tighten the nuts with a torque of 36Nm, which will ensure tightness between the base of the bridge and roofing felt.



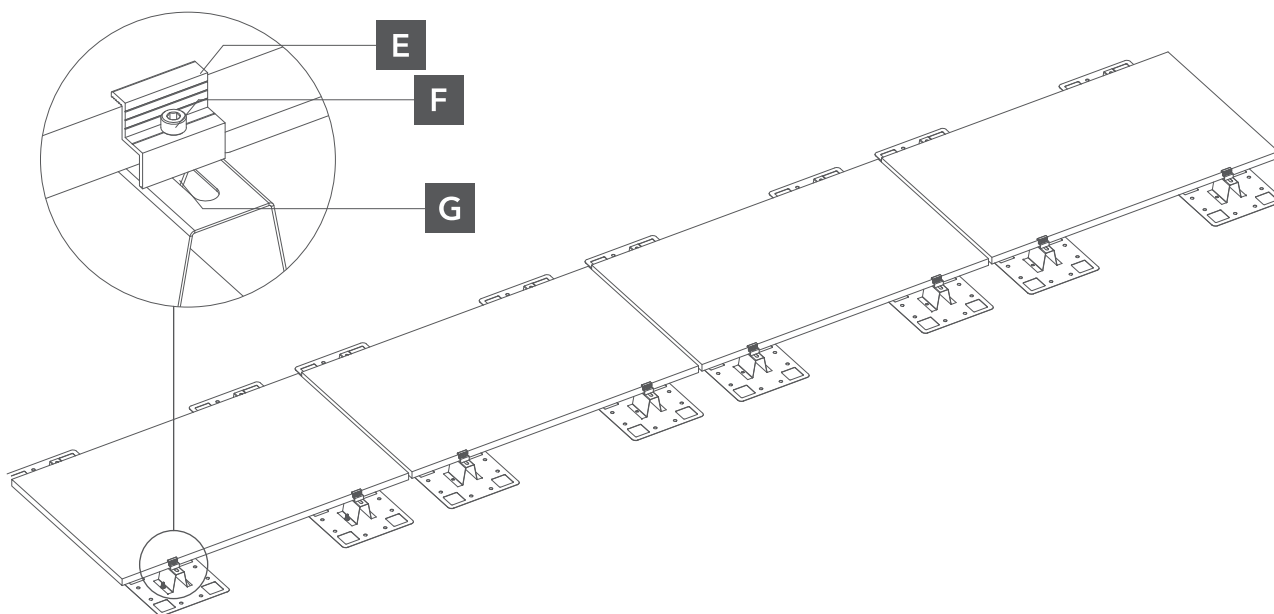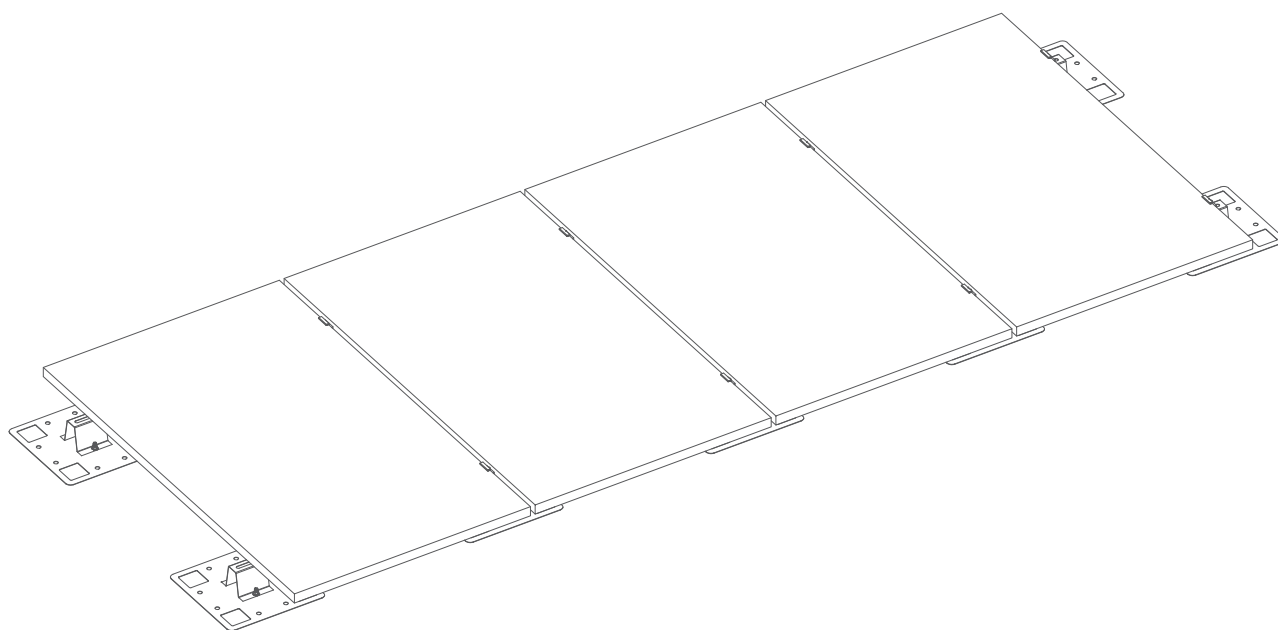- 4** Place the first extreme photovoltaic module on the mounting bar and mount the end clamps. Clamps are screwed with M8 Allen screws and M8 elongated T-nut. Repeat the process until all modules in the row have been installed.





Legal clause

This manual sets out the basic standards for the installation and operation of a support system for photovoltaic modules. The instructions do not represent and do not replace a photovoltaic installation project. The correct selection of the mounting system for photovoltaic modules and the components that belong to it is the responsibility of the persons who directly perform the installation of this system. This work should be performed by professional installers with the appropriate qualifications and experience. It is the installers' responsibility to select the correct mounting system and its integration with the building or the ground depending on the conditions of the location and the needs of the customer. IVENDO SOLAR, as a manufacturer of mounting systems, does not assume any responsibility for the proper execution and installation of the structure. It is necessary that the technical inspection of the installation is carried out at least once a year by persons with the appropriate qualifications. In case of occurrence of weather anomalies (strong gusts of wind over 79 km/h, unusual amounts of snow), a technical inspection of the installation should be carried out immediately after its completion. The construction shall be used in accordance with its purpose and environmental protection requirements. It is expected that the construction will be kept in perfect technical condition and that no significant deterioration of its operational characteristics and technical performance will be allowed. Changes and modifications of mounting systems manufactured by IVENDO SOLAR, including their cutting, welding, shortening, stretching, reducing the elements specified in the instructions, increasing the spacing of the supporting posts, increasing the load on the systems or using systems against their purpose, will result in an immediate loss of warranty rights and may shorten the life of the systems and limit their safe use.